



Easy automation of manual positioning

Auto-Positioning Units

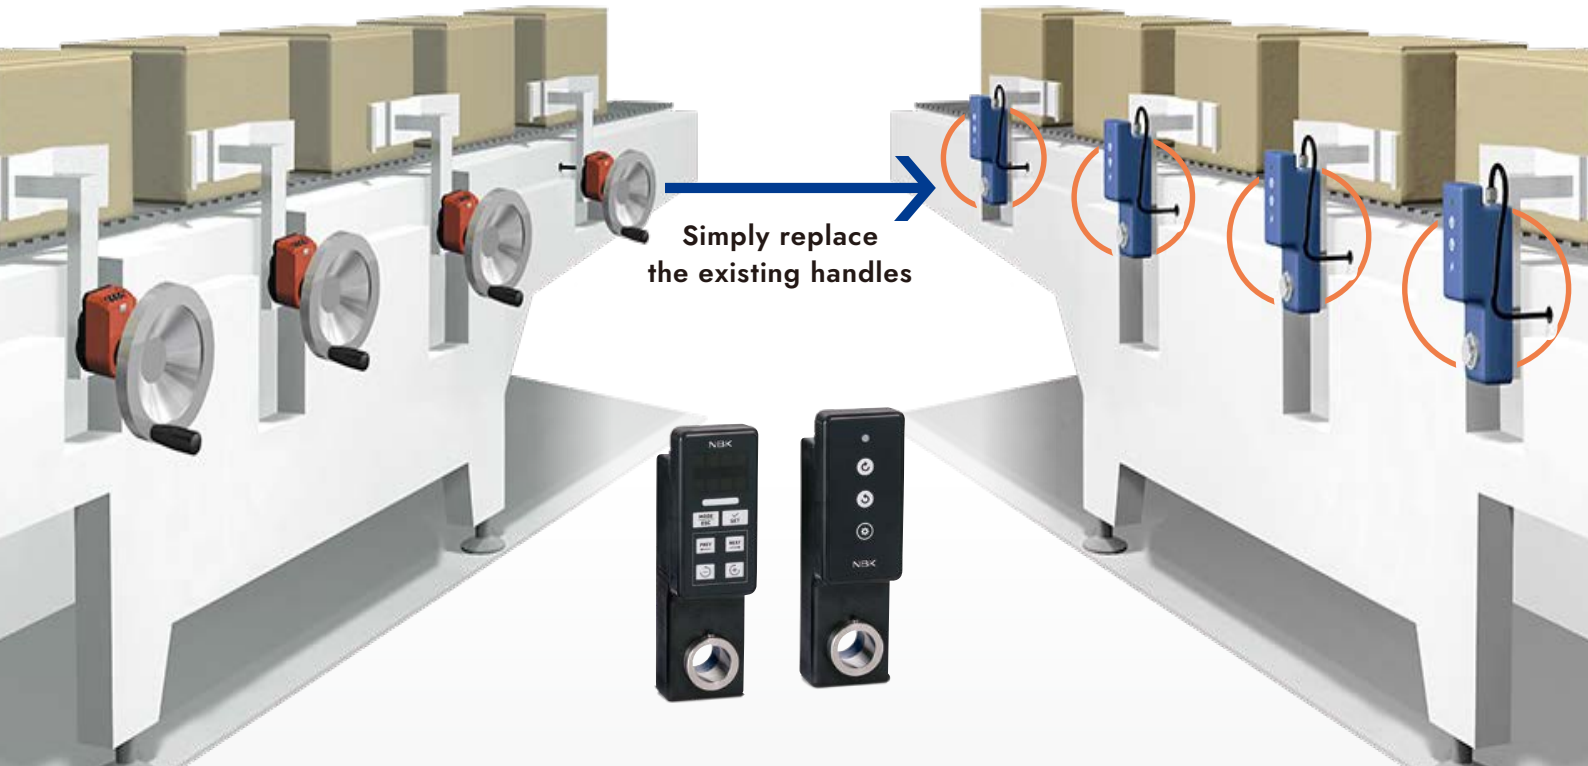

Automated positioning

The built-in motor rotates the feed screw and stops at the target position via the encoder.

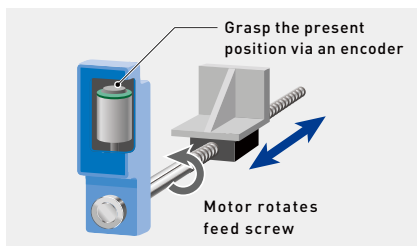

Easily replaces handles

Just replace the installed operation handle. Complex installation is not required.


Wireless communication supported*

Signals from the transceiver to each unit are transmitted wirelessly.* Cable wiring is not required.

*EPU-220

Maximum 32 unit batch control

Batch control of up to 32 units is possible, and each can also be moved separately.

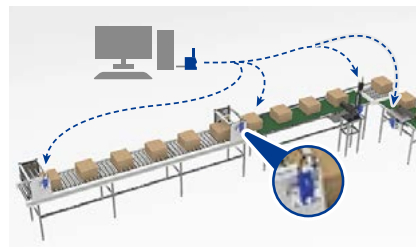

Dedicated software free of charge

With free-of-charge control software, the automated system can easily be mounted.

Dust-proof and waterproof (IP65)*

Achieves IP65* protection class. Usable even in environments exposed to dust or water.

Multiple setup patterns can be registered

The dedicated software enables numerical setting for up to 1,000 setups.*



*EPC-100: Max. 1,000 EPC-200-CC, EPC-210-EIP: Max. 100

Thin/ space-saving

Compared with the use of a handle and indicator, it is thinner and more compact.