SNSS-UCL Hex Socket Head Cap Screws - Cleanroom Washed & Packaged

Cleanroom wash & packaging SUS Stainless steel

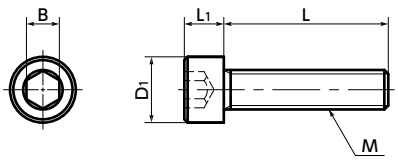

Material/Finish

RoHS

	SNSS-UCL
Main Body	SUSXM7 (Equivalent to SUS304) USC Cleaning
Strength Class	A2 - 70

Application

FPD manufacturing equipment / Semiconductor manufacturing equipment / Medical equipment / Food related machinery

- SUSXM7 hex socket head cap screw.
- Cleanroom washed (ultrasonic cleaning) and cleanroom packaged.
- For parts embedded in FPD production devices, semiconductor manufacturing devices, medical equipment, or food machinery, or used in cleanrooms.
- Complies with JIS B 1176, ISO 4762, and DIN 912. For details on shape and dimensions, please refer to the "Technical Information (JIS B 1176, ISO 4762)".

Unit : mm

Part Number 1	M (Coarse)		L 2											D1	L1	B	Mass (g)	Qty per Pack
	Nominal of Thread	Pitch																
SNSS-M2-UCL	M2	0.4	3	4	5	6	8	10						3.8	2	1.5	0.16 - 0.3	10
SNSS-M2.5-UCL	M2.5	0.45		4	5	6	8	10	12					4.5	2.5	2	0.35 - 0.59	10
SNSS-M3-UCL	M3	0.5			5	6	8	10	12	16				5.5	3	2.5	0.67 - 1.2	10
SNSS-M4-UCL	M4	0.7			5	6	8	10	12	16	20	25		7	4	3	1.4 - 3.2	10
SNSS-M5-UCL	M5	0.8				6	8	10	12	16	20	25		8.5	5	4	2.2 - 4.8	10
SNSS-M6-UCL	M6	1					8	10	12	16	20	25	30	10	6	5	4.3 - 8.3	10

- When purchasing less volume than one full bag, a separate handling fee is charged. For details, see the Sold Separately Service.

Part Number Specification

SNSS-M5 - 25 - UCL
1 2 1

1 Individual Sales	Cleanroom Wash & Packaging	Screw Length Adjustment	Vibration Resistant	Modification process for captive use
Available / Add'l charge	Cleanroom washed and packed	Available / Add'l charge	Not Available	Not Available