


# MST/MSTS Flexible Couplings - Slit Type

Zero Backlash SUS Stainless steel

## Structure

- Set Screw Type → P.xxxx
  - MST** Made of aluminum alloy
  - MSTS** Made of all stainless steel

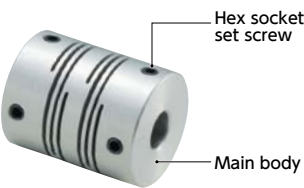

- Clamping Type → P.xxxx
    - MST-C** Made of aluminum alloy
    - MSTS-C** Made of all stainless steel
- Outside diameter  $\phi 40 - \phi 63$



- MSTS-C** Outside diameter  $\phi 12 - \phi 32$



- Set Screws + Key Type → P.xxxx
  - MST-K** Made of aluminum alloy



- MSTS-K** Made of all stainless steel



- Part number specification

**MST-32K-12-12**

Product Code Size Bore Diameter

Please refer to dimensional table for part number specification.

Additional Keyway at Shaft Hole → P.xxxx Cleanroom Wash & Packaging → P.xxxx SUS Change to Stainless Steel Screw → P.xxxx  
 Bore additional modification only/ Add'l charge Please feel free to contact us Please feel free to contact us

- Recommended Applicable Motor

	MST	MSTS
Servomotor	●	●
Stepping Motor	○	○
General-purpose Motor	●	●

○: Excellent ○: Very good ●: Available

- Property

	MST	MSTS
Zero Backlash	○	○
High Torque	○	○
High Torsional Stiffness	○	○
Allowable Misalignment	○	○
Corrosion Resistance (All S.S.)	-	○

○: Excellent ○: Very good

- This is a metal spring coupling with single-piece construction. A slit is inserted into a cylindrical material.
- A plate spring formed by a slit allows eccentricity, angular misalignment, and end-play to be accepted.
- There are two types of units made of aluminum alloy or all stainless steel.
- Wide variation of outside diameter  $\phi 8 - \phi 63$ .

- Application

Transport device / XY stage / Parts feeder

- Material/Finish







	MST / MST-C / MST-K	MSTS / MSTS-C / MSTS-K
Main Body	A2017 Anodized	SUS303
Hex Socket Set Screw	SCM435 Ferrosioferric Oxide Film (Black)	SUSXM7
Hex Socket Head Cap Screw	SCM435 Ferrosioferric Oxide Film (Black)	SUSXM7

## Selection

- Selection Based on Shaft Diameter and Rated Torque

The area bounded by the shaft diameter and rated torque indicates the selection size.

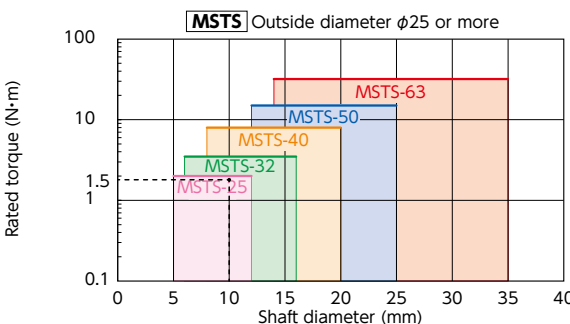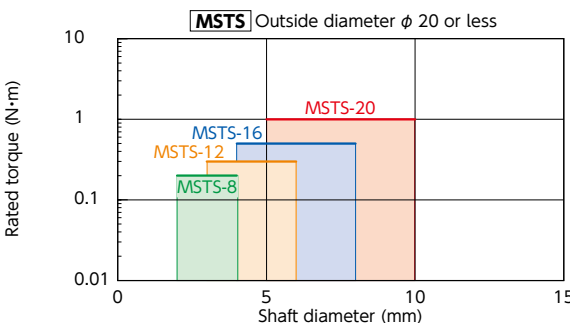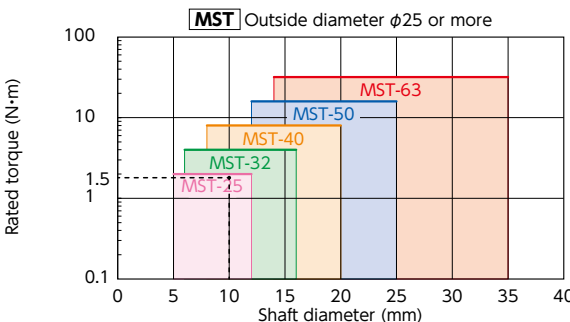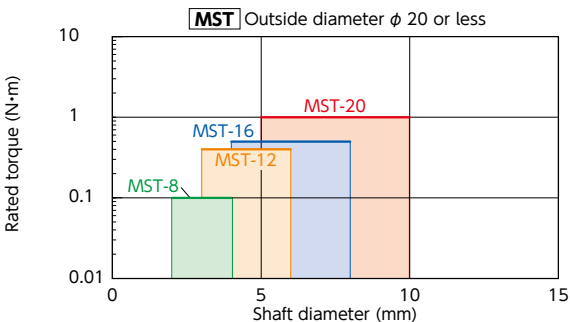

- Selection Example

In case of selected parameters of shaft diameter of  $\phi 10$  and load torque of 1.5 N·m, the selected size for **MST** **MSTS** is **MST-25** **MSTS-25**

