

# SSHS-HB Hex Socket Head Cap Screws with Special Low Profile - Head Shot Blast



WEB Selection Tool


WEB CAD Download

Vacuum

Protrusion

Cleanroom wash & packaging

SUS Stainless steel

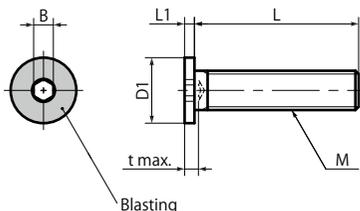

● Material/Finish

RoHS2 Compliant

	<b>SSHS-HB</b>
Main Body	SUSXM7 (S.S. grade : A2) Blasted (Head Only)
Strength Class	A2-50

● Part number specification

## SSHS - M5 - 16 - HB

Product Code **1** **2** Product Code

Order in number of packs.

Also sold separately from 1 piece up. → P.xxxx



- Socket head cap screws with special low profile with blasted head surface.
- The surface of the screw head is coarsened by blasting.
- It prevent deposits on the screw head from peeling during vacuum deposition and other film formation equipment.

**SSHS-HB**



**Unprocessed**



- Also, screws with blasted heads with special specifications are available, including dimensions and shape.

Socket Head Cap Screws with Special Low Profile

**SSHS-HB**

Hex Socket Flat Head Machine Screws



Socket Button Head Cap Screws

● Application

Film formation equipment, vacuum devices, FPD production equipment, and semiconductor devices

Unit : mm

Part Number	M	L						D1	L1	B	t	Max. Torque (N·m)	Mass (g)	
<b>SSHS-M3-HB</b>	M3	6	8	10	12			6	1.3	1.5	2	0.6	0.44 - 0.69	
<b>SSHS-M4-HB</b>	M4	6	8	10	12	16		8	1.5	2	2.5	1.5	0.89 - 1.6	
<b>SSHS-M5-HB</b>	M5		8	10	12	16	20	9	1.5	3	3	3.1	0.98 - 2.5	
<b>SSHS-M6-HB</b>	M6			10	12	16	20	25	10	1.5	3	4	5.3	1.9 - 4.8

Part Number	Qty*1 per pack
<b>SSHS-M3-HB</b>	10
<b>SSHS-M4-HB</b>	10
<b>SSHS-M5-HB</b>	10
<b>SSHS-M6-HB</b>	10

\*1 : Also sold separately from 1 piece up. → P.xxxx

Individual Sales → P.xxxx	Cleanroom Wash & Packaging → P.xxxx	Screw Length Adjustment → P.xxxx	Vibration Resistant → P.xxxx	Modification process for captive use → P.xxxx
Available / Add'l charge	Cleanroom washed and packed	Available / Add'l charge	Not Available	Available / Add'l charge